







## specifications: Isuzu 'Grafter Green' N35.125(S) Tipper 3.5T GVW / EURO 6 4x2 rigid single rear wheels




Axle weights (kg)							
UK maximum Vehicle Weights (kg)					GVW		3500
					GTW*		7000
UK Axle design weights (kg)				Front		1900	
					Rear		2000
Weights (kg)							
Cab type							day
Wheelbase		WB			2490		
Vehicle Mass Unladen					Front		1356
					Rear		779
Total							2135
GVW							3500
Payload Allowance						1365	
Max. Permissible Trailer Weight*						3500	
Dimensions (mm)							
Overall Length							5000
ody Length O		DAL Extern		al Body Length		3275	
			Internal Body Length			3125	
Body Width	OVW		External Body Width		1800		
		l II		nal Body Width		1740	
Features							
Fully galvanised steel sub frames			Fully galvanised steel tipping gear				
Multistage direct lift under floor ram			Wander lead control complete with 'Body Up' warning light				
Dual tone audible warning buzzer			Electro hydraulic power pack with thermoplastic oil reservoir				
Hose burst safety valve			Rubber mounted body rests				
Fully galvanised gantry with 'Isuzu' pressed infill panel			18mm alloy 'Tippadeck' heavy duty interlocking floor system				
Single 400mm high alloy mill finish drop side boards c/w recessed spring catches			400mm high alloy mill finish tailboard with 2-way hinge assembly and rubber stops				
Fully galvanised corner posts			Heavy duty under floor tie points either side				
Half round thermoplastic mud wings			Integral body prop				
Safety decals and colour instruction manua							

## \*Tachograph regulations may apply

Unladen weights excludes driver and fuel. Includes spare wheel + carrier (Tolerance +/- 3%). Spare wheel and carrier 32kg.
The bodybuilder is responsible for ensuring all legal requirements are met. 3. Isuzu Truck (UK) Ltd. shall have no liability whatsoever should the information supplied have incorrect data, descriptions or illustrations.

## N35.125(S) Tipper Mechanical Specification (standard equipment)



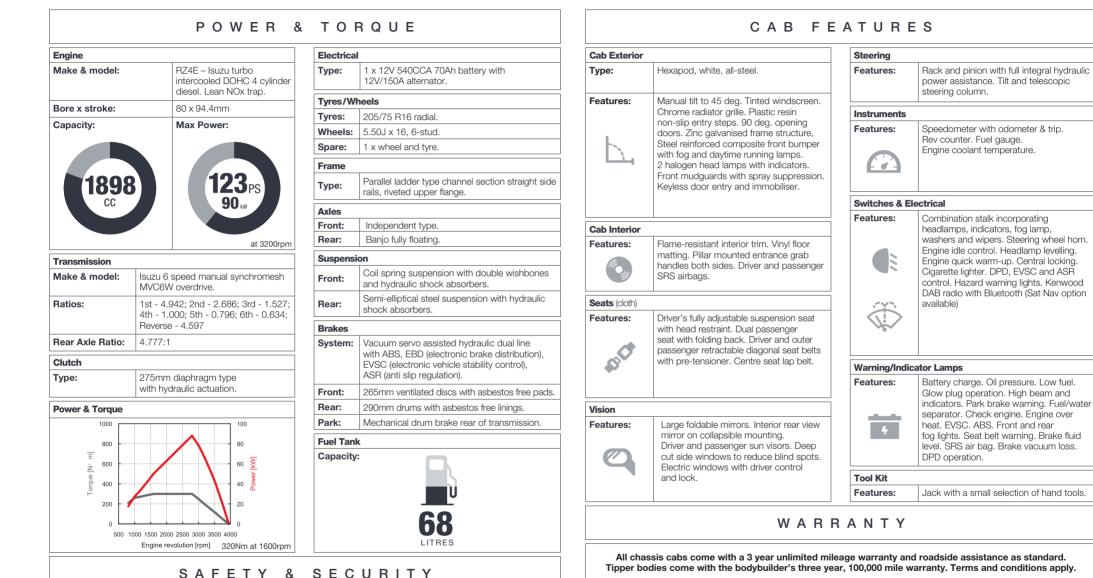

## Tipper bodies come with the bodybuilder's three year, 100,000 mile warranty. Terms and conditions apply.

Isuzu-backed Repair and Maintenance contracts available upon request.

N35.125(S) Tipper spec sheet: 30581

Complies with ECE-R29 cab strength standard.

Steel rear under run bar.

Red diagonal and lap belts.

Central locking with remote keyless entry and immobiliser.

R29 cab strength:

Central locking:

Rear bumper:

Seatbelts: