





UK standard vehicle plated weights (kg)			GVW	7500	7500
			GTW (Standard)	8250	8250
			GTW (Optional)	11000	11000
UK Axle design weights (kg)			Front	3100	3100
			Rear	6000	6000
Weights (kg)					
Cab type				day	day
Tail lift type				Column	Tuckawa
Wheelbase			WB	4475	4475
Vehicle Mass Unladen			Front	1920	1980
			Rear	2582	2552
Total				4502	4532
GVW				7500	7500
Payload Allowance				2998	2968
Max. Permissible Trailer Weight				3500	3500
Dimensions (mn	ו)				
Overall Length				8300	8200
Body Length		OAL	Internal Body Length	6096	6096
Body Width		OVW	External Body Width	2439	2439
Body Height		OH	Internal Body Height	2388	2388
Features					
Underframe	Galvanised steel sub frame long runners, galvanised steel cross bearers @ 16" pitch, lift up aluminium side guards			Yes	Yes
	Rear wide lath shutter with maximum security lock			Yes	No
Rear Aperture	Rear barn doors pre painted white with external locking gear			No	Yes
Flooring	18mm wisadeck floor			Yes	Yes
Lighting	2 internal LED lights with PIR, all LED marker lamps fitted to legal requirements			Yes	Yes
Sides	14mm GRP panel sides			Yes	Yes
Options included	2 rows of loadlok track fitted to sides, kick strip all around. Air deflector and side collars. 5 recessed lashing rings each side of floor.			Yes	Yes
	Pull out ladder step			No	Yes
Tail lift	DHOLLANDIA 1000kg column tail lift with 900mm deep platform and hinged ramps to rear			Yes	No
	DHOLLANDIA 1000kg tuck away tail lift with 1050mm deep platform, trolley stops and wander lead control			No	Yes


1. Unladen weights excludes driver, fuel, AdBlue[®], Includes spare wheel + carrier (Tolerance +/- 3%). 2. Isuzu Truck (UK) Ltd. shall have no liability whatsoever should the information supplied have incorrect data, descriptions or illustrations.

specifications: ISUZU N75.190(E) BOX 7.5T GVW / EURO VI (Easyshift transmission) 4x2 rigid



N75.190(E) Box Mechanical Specification (standard equipment)

EURO VI

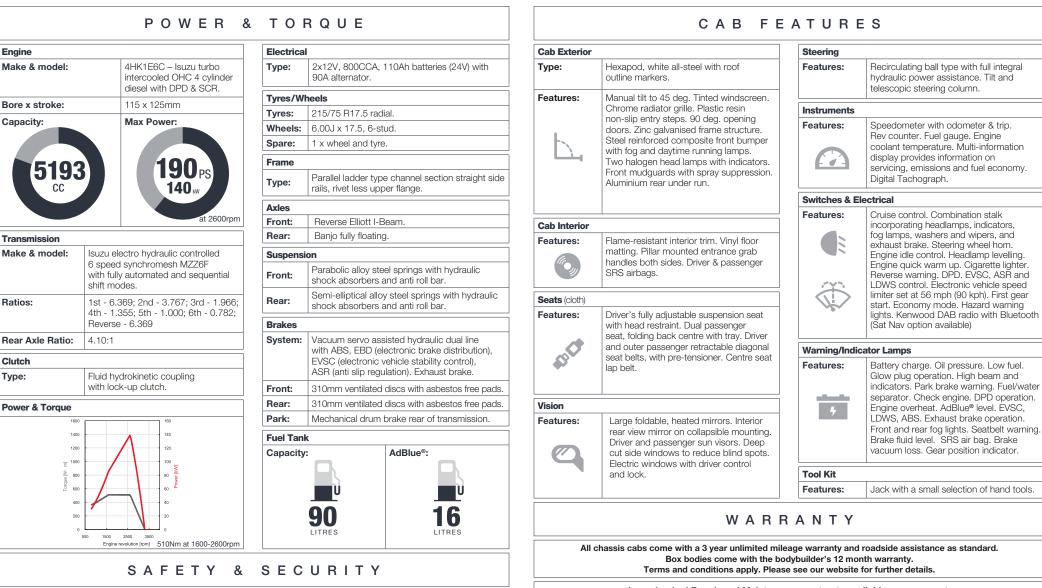

Isuzu-backed Repair and Maintenance contracts available upon request.

N75.190(E) Box spec sheet: 18760

Lane departure warning system:

Complies with ECE-R29 cab strength standard.

Red diagonal and lap belts.

Central locking with remote keyless entry and immobiliser.

Camera monitor, alerts driver with a warning buzzer and LCD monitor.

R29 cab strength:

Central locking:

Seatbelts: